


Schäkel hochfest Manilles à haute résistance

gerade / droites



8730 - 8739

geschweifft / lyres

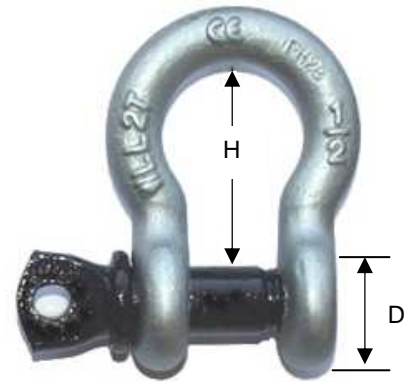

8740 - 8749

Bestell cmde No	Einheit unité St/pcs	gerade droites	Zoll pouces	Bolzen axe ca.mm	Länge longueur ca.mm	A ca.mm	B ca.mm	D ca.mm	H ca.mm	Nutzlast charge utile ca. kg
8730	25	Stahl verzinkt	3/16"	6,0	35,0	10,0	10,0	15,0	19,0	330
8731	25	acier zingué	1/4"	8,0	41,0	12,0	12,0	18,0	22,0	500
8732	25		5/16"	10,0	50,0	13,0	13,0	21,0	27,0	750
8733	25		3/8"	11,0	60,0	16,0	16,0	24,0	31,0	1000
8734	25		7/16"	13,0	69,0	18,0	18,0	28,0	36,0	1500
8735	10		1/2"	16,0	78,0	21,0	21,0	32,0	40,0	2000
8736	10		5/8"	19,0	98,0	26,0	26,0	41,0	50,0	3250
8737	10		3/4"	22,0	117,0	31,0	31,0	49,0	60,0	4750
8738	5		7/8"	25,0	134,0	35,0	35,0	55,0	68,0	6500
8739	5		1"	28,0	150,0	40,0	40,0	60,0	80,0	8500

Bestell cmde No	Einheit unité St/pcs	geschweifft lyres	Zoll pouces	Bolzen axe ca.mm	Länge longueur ca.mm	A ca.mm	B ca.mm	D ca.mm	H ca.mm	Nutzlast charge utile ca. kg
8740	25	Stahl verzinkt	3/16"	6,0	38,0	8,0	16,0	15,0	22,0	330
8741	25	acier zingué	1/4"	8,0	48,0	12,0	20,0	17,0	28,0	500
8742	25		5/16"	10,0	54,0	13,0	21,0	21,0	30,0	750
8743	25		3/8"	11,0	65,0	16,0	26,0	25,0	36,0	1000
8744	25		7/16"	13,0	76,0	18,0	28,0	27,0	43,0	1500
8745	10		1/2"	16,0	85,0	21,0	33,0	32,0	47,0	2000
8746	10		5/8"	19,0	108,0	26,0	41,0	41,0	60,0	3250
8747	10		3/4"	22,0	127,0	32,0	50,0	49,0	70,0	4750
8748	5		7/8"	25,0	150,0	37,0	57,0	55,0	83,0	6500
8749	5		1"	28,0	163,0	43,0	68,0	60,0	93,0	8500

Sicherheitsfaktor 1:6

coefficient de sécurité 1:6